



AOPEN

Bright Ideas Connected

OPS



A Powerful OPS Signage Player **WB5100**



The WB5100 is a powerful OPS (Open Pluggable Specification) Digital Signage Player that is capable of supporting Ultra HD resolution (4k*). Its smart design allows for a better thermal dispersion. Furthermore it can function as a stand-alone device which allows this product to be used flexibly in various situations.

The features of the WB5100:

- + High performance support for Ultra HD resolution (4k*)
- + The extended chassis and strategic placement of the components allows a better heat dispersion
- + Fitted with a 2nd video output
- + Signage feature for scheduling and APAR



WB5100

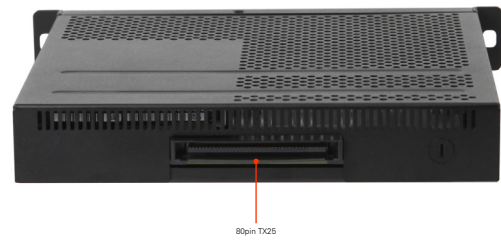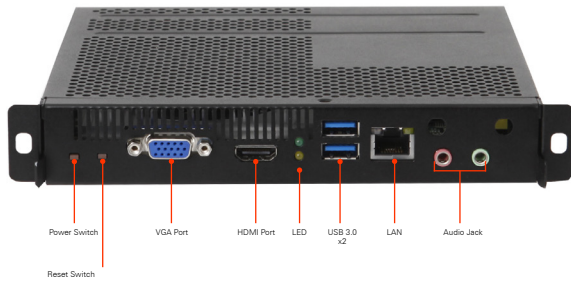

Model name		WB5100
Feature		4 K resolution, 2nd Video output, signage features for scheduling and APAR
Housing Material		SECC
Dimension	W x H x D (mm)	180 x 30 x 173 mm
	W x H x D (inch)	7.08 x 1.18 x 6.8 inch
Weight(Kg/Pound)		1.497 kg
Form Factor		OPS
CPU	Socket	LGA 1150
	Type	Intel® Haswell Refresh Supports 4th generation desktop CPU
Chipset		Intel® H81 Chipset
Memory	Channels	Dual Channel
	Type	DDRIII SO-DIMM x 2
	DDR	1333/1600
	Max Memory	16 GB
Graphics	Chip	Intel® HD Graphics 4600
	HDMI Port	HDMI 1.4a
Audio	Type	Realtek HD Audio Codec ALC662
LAN		Intel® I218LM
Expansion	Mini Card Slot	Half size mini card x 1
Storage Bay	SATA Connector	x 1 (7mm height 2.5" SATA3 HDD)

Front Panel IO	Power Switch	x 1
	VGA port	x 1
	Reset	x 1
	LAN RJ45	x 1
	HDMI Port	x 1
	USB 3.0	x 2
	Power LED and ACPI	x 2
	Audio Jack	x 2
Rear Panel IO		JAE TX25 Plug Connector (80 pin)
Cooling		Active (with Fan)
WatchDog Timer		Fintek F71808AU
Power input		12~19V
Environment		
MTBF		50,000 hrs
Operating Temperature		0 ~ 45°C (23 ~ 113°F)
Storage Temperature		-30 ~ 60°C (-4 ~ 140°F)
Relative Humidity		95% RH (50°C non-Condensing)
Operating Vibration		0.5Gms,Random,10~500Hz,X,Y,Z 3 Axes,0.5hr/Axis
Non-Operating Vibration		2Gms,Random,10~300Hz,X,Y,Z 3 Axes,1hr/Axis

*Accessories available on demand